



PRO Series

Piston
compressor
range



Air. Anytime. Anywhere




PRO Series

Direct drive and Belt driven piston compressors

ABAC PRO single stage piston compressors combine high user comfort with great durability and efficient performance. All the units are equipped with the ABAC belt guard, providing an optimal air flow over the pump. The pumps run at low speed and come with aftercoolers to reduce operating temperatures more than ever before.

Applications

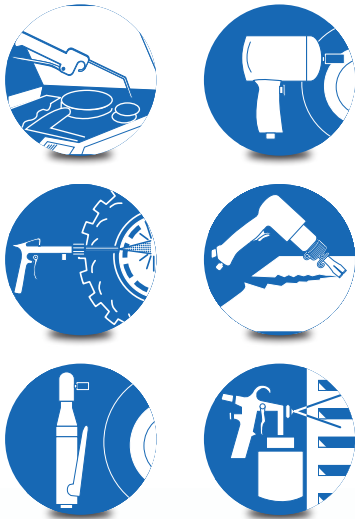

Efficiency

Highly **innovative belt guard** improving the cooling air flow over the pump

Durability

Standard aftercooler on the new highly **durable and slower running pump**.



User comfort

With maximum feet, **extra rubber handles** and lockable pivot wheels

| Direct Drive | Part Number | Tank | Pump | l/min | CFM | HP | kW | rpm | Volt | Bar | L x W x H (mm) | Kg |
|--------------|--------------------|------|------------|-------|-----|-----|-----|------|----------|-----|-----------------|----|
| | START SILENT O10P | 6L | Oil Free | 130 | 4.6 | 1 | 0.7 | 1450 | 230/1/50 | 8 | 530 x 210 x 540 | 15 |
| | START O20P | 6L | Oil Free | 230 | 8.1 | 2 | 1.5 | 2850 | 230/1/50 | 8 | 375 x 310 x 530 | 11 |
| | POLE POSITION O20P | 24L | Oil Free | 230 | 8.1 | 2 | 1.5 | 2850 | 230/1/50 | 8 | 660 x 300 x 650 | 22 |
| | MONTECARLO O20P | 50L | Oil Free | 230 | 8.1 | 2 | 1.5 | 2850 | 230/1/50 | 8 | 770 x 410 x 730 | 30 |
| | POLE POSITION L25P | 24L | Lubricated | 270 | 9.5 | 2.5 | 1.9 | 2850 | 230/1/50 | 10 | 660 x 300 x 605 | 28 |
| | MONTECARLO L25P | 50L | Lubricated | 270 | 9.5 | 2.5 | 1.9 | 2850 | 230/1/50 | 10 | 940 x 320 x 700 | 36 |
| | POLE POSITION L30P | 24L | Lubricated | 310 | 11 | 3 | 2.2 | 2850 | 230/1/50 | 10 | 660 x 300 x 605 | 29 |
| | MONTECARLO L30P | 50L | Lubricated | 310 | 11 | 3 | 2.2 | 2850 | 230/1/50 | 10 | 940 x 320 x 700 | 37 |

| Belt Drive | Part Number | Tank | Air Displacement | | Free Air Delivered | | Noise | | Motor | | Bar | L x W x H (mm) | Kg | | |
|------------|----------------------|------|------------------|------|--------------------|------|-------|-------|-------|-----|------|----------------|----|-------------------|------|
| | | | l/min | CFM | l/min | CFM | dB(A) | Lw(A) | HP | kW | | | | rpm | Volt |
| | PRO A29B 27 CM2 | 27L | 255 | 8.9 | 175 | 6.2 | 73 | 93 | 2 | 1.5 | 1075 | 230/1/50 | 10 | 810 x 390 x 710 | 43 |
| | PRO A29B 50 CM2 | 50L | 255 | 8.9 | 175 | 6.2 | 73 | 93 | 2 | 1.5 | 1075 | 230/1/50 | 10 | 870 x 370 x 780 | 49 |
| | PRO A29B 90 CM2 | 90L | 255 | 8.9 | 175 | 6.2 | 73 | 93 | 2 | 1.5 | 1075 | 230/1/50 | 10 | 1010 x 415 x 900 | 56 |
| | PRO A29B 90 FM2 | 90L | 255 | 8.9 | 175 | 6.2 | 73 | 93 | 2 | 1.5 | 1075 | 230/1/50 | 10 | 1010 x 415 x 900 | 56 |
| | PRO A29B 50 CM3 | 50L | 317 | 11.2 | 224 | 7.9 | 73 | 93 | 3 | 2.2 | 1050 | 230/1/50 | 10 | 847 x 395 x 796 | 45 |
| | PRO A29B 90 CM3 * | 90L | 317 | 11.2 | 224 | 7.9 | 73 | 93 | 3 | 2.2 | 1050 | 230/1/50 | 10 | 968 x 474 x 870 | 52 |
| | PRO A39B 90 CM3* | 90L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 230/1/50 | 10 | 1180 x 460 x 930 | 72 |
| | PRO A39B 90 FT3 | 90L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 400/3/50 | 10 | 1180 x 460 x 930 | 72 |
| | PRO A39B 150 FM3* | 150L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 230/1/50 | 10 | 1375 x 420 x 950 | 87 |
| | PRO A39B 150 FT3 | 150L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 400/3/50 | 10 | 1375 x 420 x 950 | 87 |
| | PRO A39B 200 FM3* | 200L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 230/1/50 | 10 | 1500 x 470 x 1110 | 91 |
| | PRO A39B 200 FT3 | 200L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 400/3/50 | 10 | 1500 x 470 x 1110 | 91 |
| | PRO A39B 270 FT3 | 270L | 393 | 13.8 | 280 | 10.1 | 73 | 93 | 3 | 2.2 | 1050 | 400/3/50 | 10 | 1530 x 595 x 1160 | 138 |
| | A39 270 FM3 Tandem** | 270L | 786 | 27.6 | 560 | 20.2 | 73 | 93 | 6 | 4.4 | 1050 | 230/1/50 | 10 | 1570 x 470 x 1030 | 153 |

* 16 amp supply ** A39 Tandem Unit requires 32Amp, 230/1/50 supply. Model Description :- C = Receiver on Wheels, F = Receiver is Floor Mounted



Air. Anytime. Anywhere.

Your Authorised Distributor